




EAS ADAPTOR GDO-IO TO 4/100 INSTALLATION INSTRUCTIONS

Kit Part No. 15325

INSTALLATION STEPS

1. Position door for clear access to the mounting end of the door drum.
2. Fit all three MIO bolts in the right hand slotted holes. Ensure the bolt heads are properly inserted and aligned into the allocated holes.
3. Place the Adaptor Plate over all three bolt threads.
4. Fit the Nyloc nuts to all three bolt threads and tighten accordingly.
5. Mount the GDO-IO Opener as per the instructions. Ensure the adaptor is slotted correctly in between the three prongs.

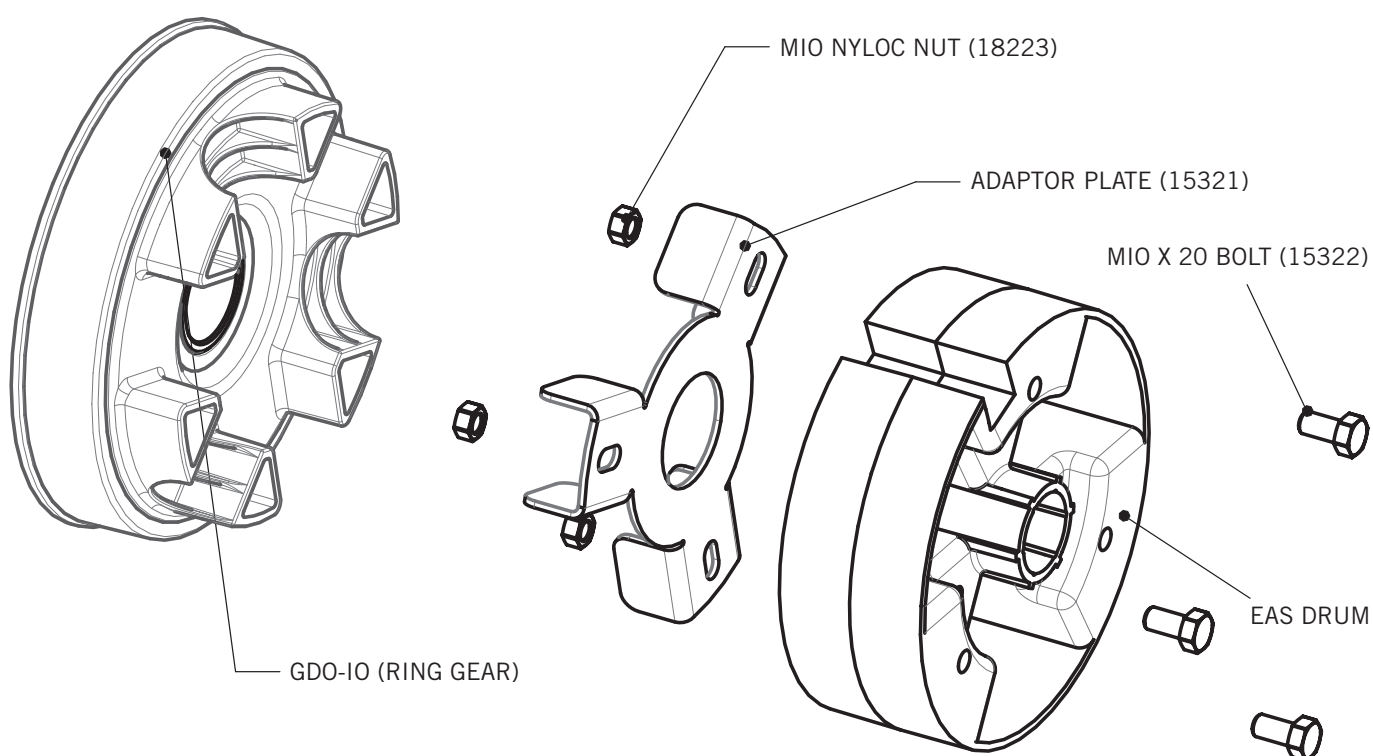

Part no.	Description	Qty
15321	GDO-IO to 4/100 - EAS Adaptor	1
15322	MIO x 20 Bolt	3
18223	MIO Nyloc Nut	3
15324	Installation Instructions	1

DISCLAIMER

**THESE INSTRUCTIONS ARE INTENDED FOR PROFESSIONAL GARAGE DOOR INSTALLERS
and only apply to the fittings**

Note: All references are taken from inside looking out

