




FRONT MOUNTED LOW HEADROOM DOUBLE TRACK INDEPENDENT TORSION (FOR 250MM MINIMUM HEADROOM) INSTALLATION INSTRUCTIONS

The kit will be supplied with two parts that need to be modified slightly on site as indicated following. Otherwise the overall configuration is straight forward as shown below.

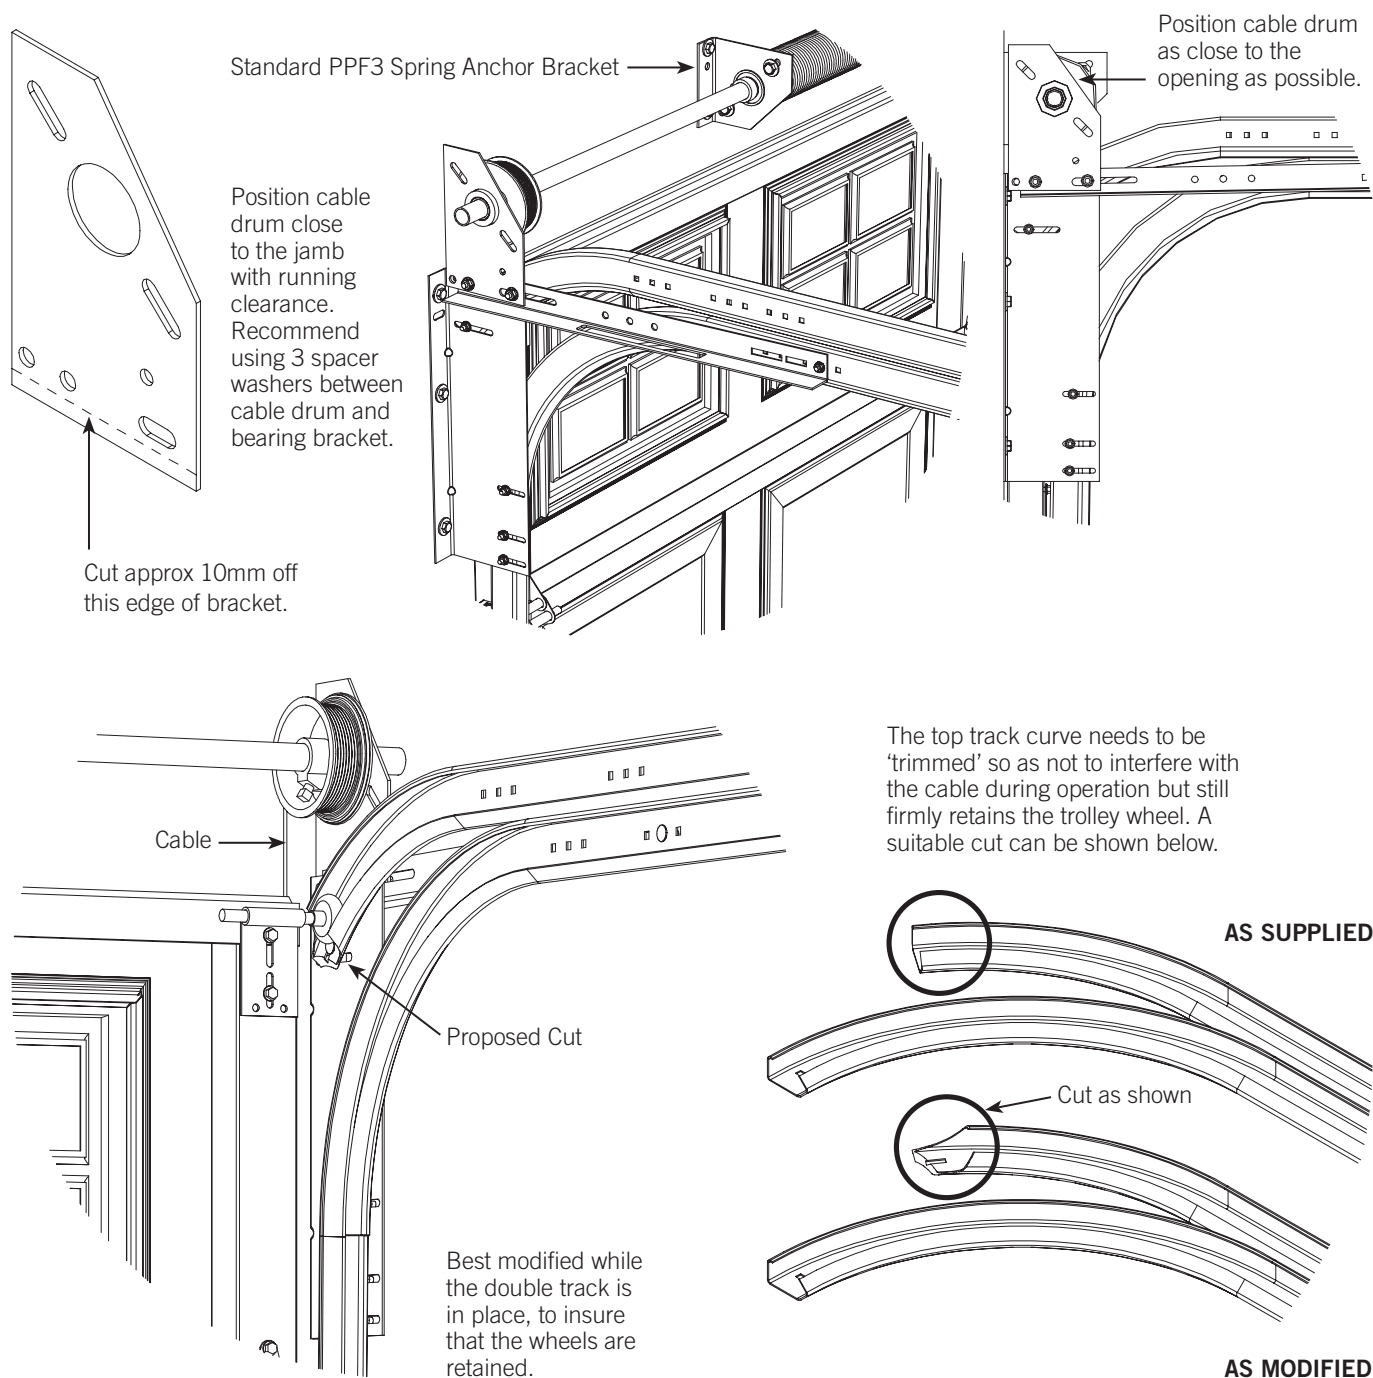

DISCLAIMER

THESE INSTRUCTIONS ARE INTENDED FOR PROFESSIONAL GARAGE DOOR INSTALLERS
and only apply to the fittings

Note: All references are taken from inside looking out

