



National Garage
REMOTES & OPENERS


Boss BHT3 Programming Guide



Genuine BHT3



Auto Openers BHT3

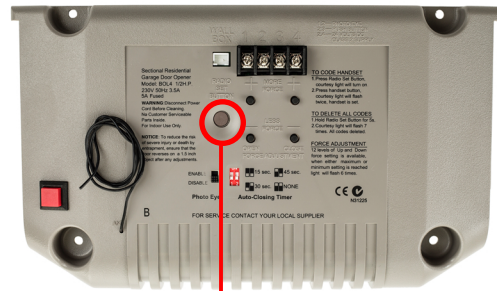

Radio Set Button For Boss BOL4

Programming Your Remote Control

For Overhead / Panel motors

1 Remove the two screws located on the bottom side of the faceplate to locate the grey colored box. Move the window to access the Program Switch. Press and hold the Program Switch until the yellow coding light illuminates. Continue to step 2.

For Roller motors

- 1 Remove the box from the wall and locate the Program Switch on the rear. Press and hold the Program Switch until the yellow coding light illuminates. Continue to step 2.
- 2 Press and release the button on the remote control that you wish to operate the door. The Green LED will begin to blink.
- 3 Press and hold the same remote button down again and the Green LED will go solid, then the yellow LED will turn off.
- 4 Test the operation of your new remote control!

Clearing The Codes From Your Motor

- 1 For overhead openers, hold down the Radio Set button for 5 seconds
- 2 For roller openers, turn power off to the motor and hold down the Learn button.
- 3 Whilst still holding the button down, turn power back onto the unit and continue to hold for 10 seconds.
- 4 Test your remote to make sure it no longer operates your motor
 - Please note, this will clear every remote programmed into the motor

For technical support, see our website below.

Please have the model number of your remote control and garage / gate opener before calling.

www.ngro.com.au