




National Garage
REMOTES & OPENERS

Elsema Remotes

Programming Guide



Genuine FMT301

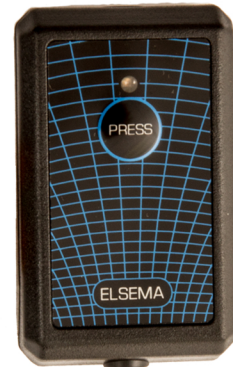

Genuine KEY301

Programming Your Remote Control

If You Are Currently Using an Elsema Remote:

- 1 Remove the front cover from your new remote, as well as your existing remote
- 2 Simply cover the 12 dipswitch combination from your old remote to your remote
- 3 Refit covers. Your remote is now ready for use!

If You Are Currently Using an Elsema Remote:

- 1 Remove the front cover from your new remote, as well as your existing remote
- 2 Using the below guide, change the code from your ATA remote to your new Elsema remote. For example:
If your ATA Switch 12 is up, the Elsema's switch 1 would be up
If your ATA Switch 11 was down, the Elsema's switch 2 would be down

1	2	3	4	5	6	7	8	9	10	11	12	ATA Code
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
12	11	10	9	8	7	6	5	4	3	2	1	Elsema Code

For technical support, see our website below.
Please have the model number of your remote control and garage / gate opener before calling.

www.ngro.com.au